

Product Specifications Document

PRODUCT NAME

SEGA TAP

MODEL NUMBER

MK 1654

1. Table of Contents

1. Table of Contents	2
2. Limitations on Applicability	3
3. Destination Model	3
4. External Appearance	3
5. Characteristics Compatibility	4
6. Measurements	4
7. Applicable Conditions	4
8. Electrical Specifications	5
9. System	5
10. SET Contents	5
11. Alterations	5

2. Limitations on Applicability

This specifications document applies to the Sega Enterprises product listed below.

SEGA TAP

3. Destination•Model

Assuming this product will be sold in Japan, Europe and the U.S., this product is assigned the below model number.

Overseas Specifications MK 1654

4. External Appearance

5. Characteristics•Compatibility

The SEGA TAP is intended for Japan, Europe and the U.S. The SEGA TAP connects to the Mega Drive control pad terminal. Up to 4 control pads can be connected to the SEGA TAP.

In the Select Mode, Multi Mode allows 4 control pads to be used simultaneously; Switch allows switching back and forth between control pads. To play in the Muti Mode, specific software is necessary.

Under normal conditions the SEGA TAP is conneced to terminal 2. Those peripherals which can be connected to the SEGA TAP are the Mega Drive 3 button control pad, the 6 button control pad and the mouse. By connecting a SEGA TAP to both terminal 1 and 2, up to 8 players can play.

Compatibility: Mega Drive, Mega Drive 2, Wonder Mega, Tera Drive.

6. Measurements

Δ Main Body

- Measurements 140 (W) x 84 (D) x 34 (H) mm

• Weight unspecified

• Cable Length 300 mm

Δ Packaging

• Measurements 143 (W) x 127 (D) x 37 (H) mm

• Weight unspecified

Δ Master Carton (containing 20 sets)

• Measurements 400 (W) x 438 (D) x 276 (H) mm

• Weight unspecified

• Volume 0.048 cubic meters

7. Applicable Conditions

Transportation 0° C - 40° C 10 % RH - 80 % RH
(free of condensation)

Storage -20° C - 70° C 5 % RH - 95 % RH

8. Electrical Specifications

Power Input Voltage DC 5 V (supplied by a 9 P cable)

Power Consumption ±10 mA

Select Switch 5 settings (A,B,C,D,Multi)

A	utilizes the control pad which is connected to terminal A									A
B	”	”	”	”	”	”	”	”	”	B
C	”	”	”	”	”	”	”	”	”	C
D	”	”	”	”	”	”	”	”	”	D

Multi Multi Mode Application (specific software necessary)

9. System

Slide Switch	1 EA	Slide method
Connector	4 EA	9 P D-SUB
Included Connector Cable	1 EA	9 Core 9 P Length 300 mm

10. SET Contents

Main Body	1 EA	Wrapped in plastic bag
Service Manual	1 EA	” ” ” ”
Color Seal	1 EA	” ” ” ”
Inner Box	1 EA	
Master Carton	1/20 EA	20 sets per carton

11. Alterations

Multi-selector for the Mega
Drive

SEGA TAP

Δ Software for a large number of people is interesting!

By looking at arcade centers where competition-type games have become a hit, it is evident that the era has arrived in which a large number of people can simultaneously play and compete in a game. A multi-selector (SEGA TAP) for the Mega Drive, which is in-line with the multi-player era, has entered the stage.

Δ The possibility of multiple players to simultaneously take part in heated competition is bound to expand the Mega Drive world!


By using 2 SEGA TAPS, it is possible for up to 8 people to play. With family or friends, as well as with unfamiliar game fans, multiple players can participate and enjoy a heated competition. For those players without friends, with the SEGA TAP it should be possible to make 100 new friends!

Δ Also possible to use 2 selector peripheral!

The SEGA TAP can be used as the selector for several peripherals, including the 6 button fighting pad, arcade power stick and Sega mouse. Game play can be enjoyed by connecting peripherals to terminal numbers which correspond to the numbers on a 4-setting changeover switch.


Δ More and more compatible software enters the stage!

"J. League Pro Striker" will be the first SEGA TAP compatible software to be released. Hereafter, additional exciting software such as "Multi-Baseball" (tentative name) will also be released.

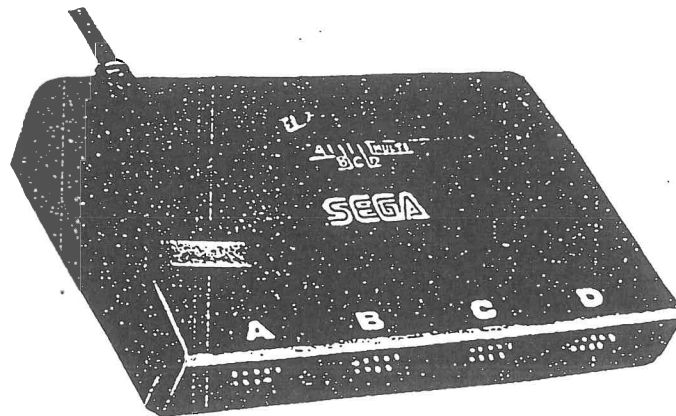

Multi-selector for the Mega-Drive

Using the changeover switch

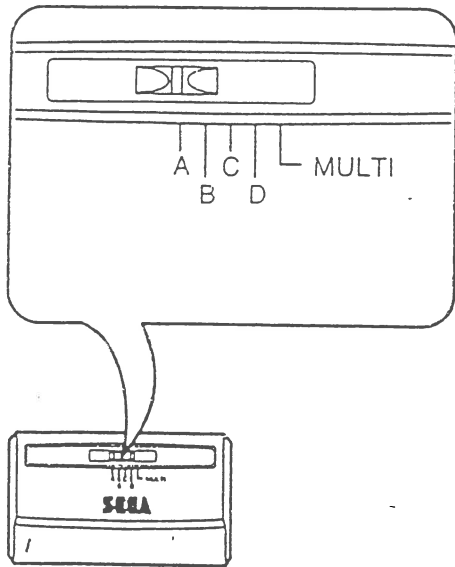

- When playing a Sega Tap compatible game with more than 3 persons, set the changeover switch to MULTI.
- Playing with 2 persons. Connect player 2's control pad to one of the terminals A-D and set the changeover switch to the position which corresponds to the terminal to which the control pad is connected.
- When using the selector. Peripherals like the Sega Mouse (sold separately) can also be used by connecting these to the Sega Tap. In this case, please set the changeover switch to the position, which corresponds to the terminal to which the peripheral is connected.

SEGA™